



Lance pipe holders can be adjusted to fit multiple pipe diameters by changing the size of grommet that is used.



3/8" Oxygen Hose with fittings



Man in appropriate safety gear using oxygen lance pipe.

MINCO PIPE, INC.

888-333-0028



Get the free app *QR reader* for smart phones and scan the bar code for more information

MINCO PIPE, INC.

3400 W. MARSHALL AVE., STE. 428

LONGVIEW, TEXAS 75604

PHONE: (903) 759-2711


FAX: (903) 759-8950

TOLL FREE: 888-333-0028

EMAIL: MINCOPIPE@SBCGLOBAL.NET



MINCO PIPE, INC. LANCE PIPE

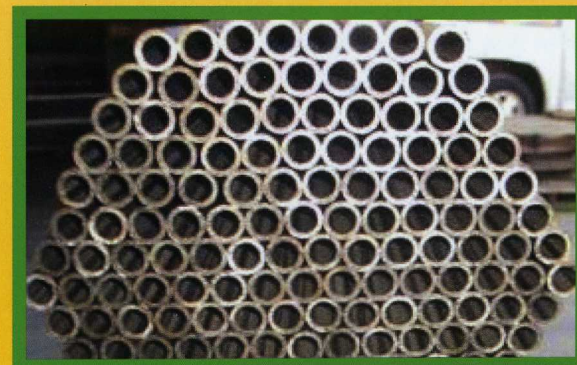



MINCO PIPE, INC.

3400 W. MARSHALL AVE.
SUITE 428
LONGVIEW, TEXAS 75604
TOLL FREE: 888-333-0028

WAREHOUSES IN:
LONGVIEW, TEXAS
STRYKER, OHIO
FORT WAYNE, INDIANA



Oxygen Lance is a **hollow** electric welded tube used in various sizes from 1/8" to 2" inside diameter. The product must be oil and grease-free to prevent explosions that may occur due to the mixing of oxygen and oil. Common terminology used when ordering is: "cleaned for oxygen use." Oxygen Lance Pipe is offered in a variety of end finishes. End caps are provided to prevent contamination. Oxygen Lancing is a reliable method for tapping heats and for other production operations.

End Finish



Plain End - PE



Threaded One End - TOE

Threaded Both Ends - TBE

Threaded and Coupled - TC



Quick Coupled - QC

OXYGEN LANCE PIPE COMMON SIZES

.250" O.D. X 36"

.250" O.D. X 42"

.250" O.D. X 48"

.406" O.D. X 10'6"

.540" O.D. X 10'6"

.675" O.D. X 10'6"

.840" O.D. X 10'6"

.922" O.D. X 10'6"

1.050" O.D. X 10'6"



Oxygen Lance Pipe Uses

Lances are used for opening furnace tap holes, opening ladles, cleaning ladle well blocks, unclogging tundish nozzles, cutting ferrous materials, providing the steel or iron is hot enough to sustain burning, i.e. cutting skulls, spill clean-up, etc.